


Indoor Simplex Cable (1F)




Temperature Range:
Storage & Operating: - 20°C to 60°C

Standards:
Comply with standard YD/T1258.2-2003 and IEC 60794-2-10/11

Technical Parameter:

Cable Diameter (mm)	Tight Buffer Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
1.6+- 0.2	0.6	2.5	100	60	100	500	60	30
1.8+-0.2	0.6	3.5	100	60	100	500	60	30
3.0+-0.2	0.9	8	100	60	100	500	60	30

Duplex Zip cord Cable(2F)

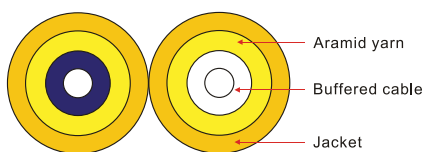

Standards:
Temperature Range:
Storage & Operating: - 20°C to 60°C

Standards:
Comply with standard YD/T1258.2-2003 and IEC 60794-2-10/11

Technical Parameter:

Cable Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Minimum Bending radius (mm)	
		Short-term	Long-term	Static	Dynamic
2.0 x 4.1	8	200	100	60	30

Transmission Characteristics:

Fiber Mode	SMF	MMF 50/125	MMF 62.5/125
Wave Length	1310/1550 (nm)	850/1300(nm)	850/1300(nm)
Max Attenuation (dB/km)	0.45/0.30	3.5/1.5	3.5/1.5
AVG. Attenuation (dB/km)	0.40/0.25	3.0/1.0	3.0/1.0
Min Bandwidth (MHz/km)	-----	400/400	160/500