


Duplex Round Cable (2F)




Temperature Range:
Storage & Operating:- 20°C to 60°C

Standards:
Comply with standard YD/T1258.2-2003 and IEC 60794-2-10/11

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	4.5	17.8	500	300	1000	200	30	100
2	4.2	15.2	220	140	1000	200	30	100
2	3.6	9.0	200	130	500	100	30	100
2	3.2	7.1	200	130	500	100	30	100
2	3.0	6.6	150	80	500	100	30	100
2	2.5	4.8	150	80	500	100	30	100

Flat Twin Cable (2F)

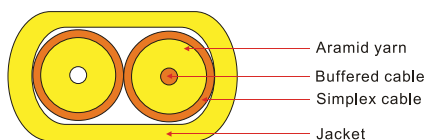

Temperature Range:
Storage & Operating:- 20°C to 60°C

Standards:
Comply with standard YD/T1258.2-2003 and IEC 60794-2-10/11

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	6.0+0.4 x 2.8+0.2	15.6	200	100	1000	200	10	20
2	4.2+0.4 x 2.8+0.2	10.5	200	100	500	100	10	20
2	3.4+0.4 x 1.6+0.2	7.3	200	100	500	100	10	20