


Outdoor Armoured Loose tube Cable (2-12F)

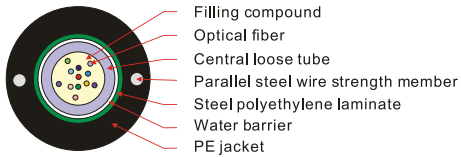

Temperature Range:

Storage & Operating: - 20°C to 60°C

Standards:

Comply with standard YD/T1258.2-2003 and IEC 60794-2-30/31

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	8.5	90	2000	1000	1000	300	20	10
4	8.5	90	2000	1000	1000	300	20	10
6	8.5	90	2000	1000	1000	300	20	10
8	8.5	90	2000	1000	1000	300	20	10
12	8.5	90	2000	1000	1000	300	20	10