


Outdoor Drop Cable (1-2F)



Temperature Range:

Storage & Operating:- 20°C to 60°C


Standards:

Comply with standard YD/T1258.2-2003 and IEC 60794-2-30/31

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
1-2	2.0 X 3.0 +/- 0.2mm	15.6	600	300	1000	500	30	20

Indoor Armored Cable

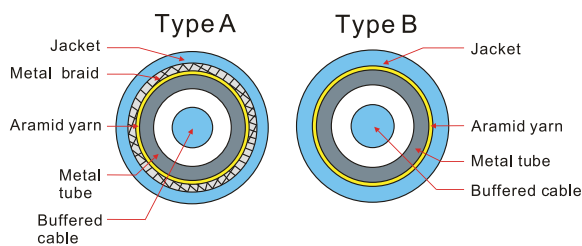

Temperature Range:

Storage & Operating:- 20°C to 60°C

Standards:

Comply with standard ITU.T G.652D / G.657A

Technical Parameter:

Parameter	Unit	Standard and Requirement			
		PC(SM)	UPC (SM)	APC(SM)	PC(MM)
Insertion Loss (Typical)	db	<=0.3	<=0.3	<=0.3	<=0.3
Return Loss	db	>=45	>=55	>=60	>=35
Mechanical Endurance (500T)	db	<=0.2			
Exchangeability	db	<=0.2			
Durability	Time	>1000			
Vibration	db	<=0.2			
Cable Diameter	Mm	3.0, 2.0, 0.9			