


Outdoor Cable (2-144F)

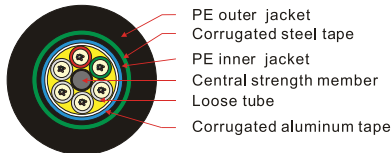


Temperature Range:
Storage & Operating:- 40°C to 60°C
Standards:
Comply with standard YD/T1258.2-2003
and IEC 60794-2-30/31

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight (Kg/Km)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	10.9	110	1500	600	1000	300	20	10
4	10.9	110	1500	600	1000	300	20	10
6	10.9	110	1500	600	1000	300	20	10
8	10.9	110	1500	600	1000	300	20	10
12	10.9	110	1500	600	1000	300	20	10
24	14.5	155	3000	1000	3000	1000	20	10
48	15.5	210	3000	1000	3000	1000	20	10
72	15.5	210	3000	1000	3000	1000	20	10
96	16.5	275	3000	1000	3000	1000	20	10
144	19.6	345	3000	1000	3000	1000	20	10

Outdoor Cable (2-144F)

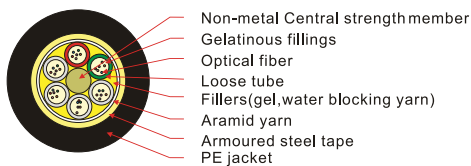

Temperature Range:
Storage & Operating:- 40°C to 60°C
Standards:
Comply with standard YD/T1258.2-2003
and IEC 60794-2-30/31

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
		Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	10	1500	600	1000	300	20	10
4	10	1500	600	1000	300	20	10
6	10	1500	600	1000	300	20	10
8	10	1500	600	1000	300	20	10
12	10	1500	600	1000	300	20	10
24	10	1500	600	1000	300	20	10
48	11	3000	1000	1000	300	20	10
72	12	3000	1000	1000	300	20	10
96	13.6	3000	1000	1000	300	20	10
144	16.9	3000	1000	1000	300	20	10