


Outdoor Cable (2-288F)

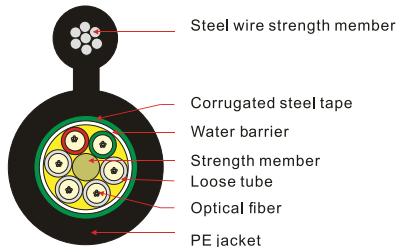


Temperature Range:
Storage & Operating:- 40°C to 60°C
Standards:
Comply with standard YD/T1258.2-2003 and IEC 60794-2-30/31

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight Kg/Km	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	8.6	185	8000	3000	2000	800	20	10
4	8.6	185	8000	3000	2000	800	20	10
6	8.6	185	8000	3000	2000	800	20	10
8	8.6	185	8000	3000	2000	800	20	10
12	8.6	185	8000	3000	2000	800	20	10
24	8.6	185	8000	3000	2000	800	20	10
48	8.6	185	8000	3000	2000	800	20	10
72	8.6	185	8000	3000	2000	800	20	10
96	8.6	185	8000	3000	2000	800	20	10
144	8.6	185	8000	3000	2000	800	20	10
288	8.6	185	8000	3000	2000	800	20	10

Outdoor Cable (2-12F)

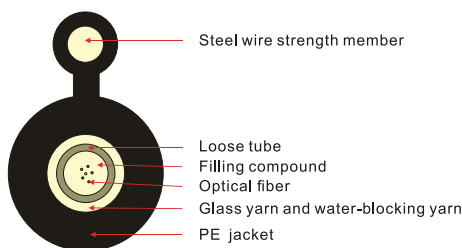

Temperature Range:
Storage & Operating:- 40°C to 60°C
Standards:
Comply with standard YD/T1258.2-2003 and IEC 60794-2-30/31

Technical Parameter:

Fiber Count	Cable Diameter (mm)	Weight Kg/Km	Tensile Strength (N)		Crush Resistance		Minimum Bending radius (mm)	
			Short-term	Long-term	Short-term	Long-term	Static	Dynamic
2	2.0+0.2 x 3.2+0.2	8.5	100	60	1000	300	30	15
4	2.0+0.2 x 3.0+0.2	9	100	60	1000	300	30	15
6	2.0+0.2 x 3.8+0.2	9.5	100	60	1000	300	30	15
8	2.0+0.2 x 5.5+0.2	13	100	60	1000	300	30	15
12	2.0+0.2 x 5.8+0.2	16	100	60	1000	300	30	15